For Residential and Commercial Applications			
Job Name	Engineer / Architect		
Job Location	Wholesaler		
Submittal Date	Contractor		

BL12-**WA Speedi Plumb[®] PLUS Braided Washing Machine Connector – Female Hose Thread

Use: For use in potable water distribution systems in accessible locations only.

Design Features:


- Engineered polymer braided fibers bend freely without kinking or crimping
- Reinforced PVC inner hose ensures durability
- **Rubber washers** provide a large pliable sealing surface and ensure a long lasting water-tight connection
- 8-sided pneumatic crimp provides greater dependability for realible nut-to-hose connections
- Mo Lead

Operating Specifications:

Temperature:	40°-140° F, intermittent to 180° F
Pressure:	125 PSI maximum

Tubing Diameter: 0.450" ID (0.660" OD)

MATERIAL SPECIFICATIONS		
Inner Hose	EPDM or reinforced PVC	
Braiding	PVC coated polyester yarn	
Barb	Brass	
Ferrule	Zinc-plated steel	
Nut	Brass, chrome plated	
Washer	Rubber	



INFO

Part Listing:

BL12-48WA	3/4" female hose thread x 3/4" female hose thread x 48" length, sleeve
BL12-48WA B	3/4" female hose thread x 3/4" female hose thread x 48" length, bulk
BL12-48WA F	3/4" female hose thread x 3/4" female hose thread x 48" length, flag labeled
BL12-48WA P	3/4" female hose thread x 3/4" female hose thread x 48" length, bagged
BL12-60WA	3/4" female hose thread x 3/4" female hose thread x 60" length, sleeve
BL12-60WA B	3/4" female hose thread x 3/4" female hose thread x 60" length, bulk
BL12-60WA F	3/4" female hose thread x 3/4" female hose thread x 60" length, flag labeled
BL12-60WA P	3/4" female hose thread x 3/4" female hose thread x 60" length, bagged

This specification and all information contained herein is the confidential and exclusive property of BrassCraft Manufacturing, and shall not be disclosed to others without the written consent of BrassCraft Mfg. This specification must be returned to BrassCraft Mfg. if requested.




400.112 BL12-**WA SPP Braided Washing Machine Connector REV 07/13

BL12-**WA Speedi Plumb® PLUS Braided Washing Machine Connector – Female Hose Thread

Part Listing (con't):

BL12-60WA PX2	$3/4^{\prime\prime}$ female hose thread x $3/4^{\prime\prime}$ female hose thread x $60^{\prime\prime}$ length, 2 per bag, cutcase of 5
BL12-72WA	3/4" female hose thread x 3/4" female hose thread x 72" length, sleeve
BL12-72WA B	3/4" female hose thread x 3/4" female hose thread x 72" length, bulk
BL12-72WA F	3/4" female hose thread x 3/4" female hose thread x 72" length, flag labeled
BL12-72WA P	3/4" female hose thread x 3/4" female hose thread x 72" length, bagged

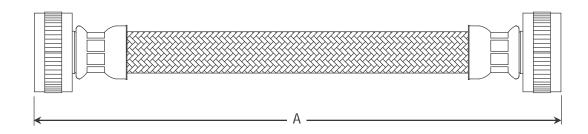

PART DIMENSIONS (Inches)			
Model	DIM. A		
BL12-48WA	48.0 / 49.0		
BL12-60WA	60.0 / 61.0		
BL12-72WA	72.0 / 73.0		

Listings & Certifications:

- IAPMO listed to ASME A112.18.6 and CSA B125.6 (File # 0452)
- CSA listed to ASME A112.18.6 and CSA B125.6 (File #204593)
- No-Lead product CSA listed to Low-Lead Content Certification Program – Plumbing Products Class 6853-01





400.112 BL12-**WA SPP Braided Washing Machine Connector REV 07/13