Occasion™

KOHLER Faucets

Wall-mount bathroom sink faucet handle K-27012-4

Features

- A single handle controls both on/off activation and temperature setting.
- Valve included.
- KOHLER ceramic disc valves exceed industry longevity standards for a lifetime of durable performance.
- Part of the Occasion bathroom faucet and accessory collection.

Material

- Premium metal construction for durability and reliability.
- KOHLER finishes resist corrosion and tarnishing.

Installation

Wall-mount.

Required Products/Accessories

For wall-mount installation K-27011-ND

Optional Products/Accessories

K-7107 Decorative Drain K-7108 Decorative Drain

K-7114 Pop-Up Drain

K-7114-A Pop-Up Drain

K-7124 Pop-Up Clicker Drain

K-7124-A Pop-Up Clicker Drain

K-7127 Drain

K-7127-A Drain


K-7129 Drain

K-7129-A Drain

Included Components

Additional Components:

Single-Control Wall-Mount Valve



| ADA CSA B651 | ОВС |
|--------------|-----|
|--------------|-----|

Codes/Standards

ASME A112.18.1/CSA B125.1 NSF/ANSI 61 NSF/ANSI 372 ADA ICC/ANSI A117.1 CSA B651 OBC

KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.


| Color | Code | Description |
|-------|------|-----------------------------------|
| | CP | Polished Chrome |
| | SN | Vibrant® Polished Nickel |
| | BN | Vibrant® Brushed Nickel |
| | BL | Matte Black |
| | 2MB | Vibrant® Brushed Moderne Brass |
| | вмв | Matte Black with Moderne Brass |






Occasion™

Wall-mount bathroom sink faucet handle K-27012-4

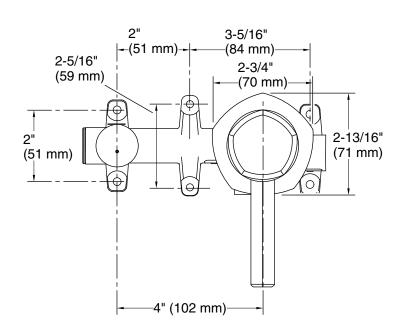

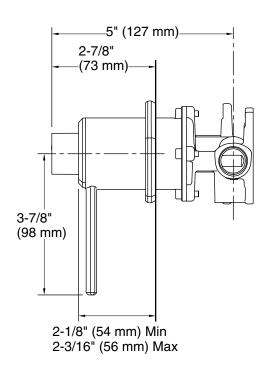

Technical Information

All product dimensions are nominal.

Faucet:

Flow rate: 1.2 gal/min (4.5 l/min)

Pressure: 60 psi (4.1 bar)

Drain included: No Drain with overflow: No

Notes

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

