

EAST LINEAR

Features

Bridge Style Kitchen Faucet with Sidespray

- Solid brass construction
- Bridge-style brass valve bodies
- Quarter-turn washerless ceramic disc valve cartridges
- Swivel spout assembly
- Solid brass pull-out sidespray assembly
- 8.32" (21.1 cm) spout height at outlet
- 9.30" (23.6 cm) spout reach (c-c)
- For 8.00" (20.3 cm) centers
- ADA Complaint (Handles Only)
- 1.8 GPM (6.8 LPM) Max





Codes / Standards Compliance

Meets or exceeds the following at date of manufacture:

- ASME A112.18.1/CSA B125.1
- IAMPO/cUPC
- NSF/ANSI 61, SECTION 9
- NSF/ANSI 372
- IPC
- ADA & ICC/ANSI A117.1 (Handle Only)
- Energy Policy Act of 1992
- California Energy Commission
- ASME A112.18.3 (Back Flow)
- All applicable US Federal and State material regulations

Colors / Finishes

- 10B: Oil Rubbed Bronze
 15: Polished Nickel
 15S: Satin Nickel PVD
 26: Polished Chrome
- Other: Refer to the Newport Brass catalog for additional color/finish options.




Specified Model		
Model	Description	Colors Finishes
1500-5412	Bridge Style Kitchen Faucet with Sidespray	□ 10B □ 15 □ 15S □ 26 □ Other

Product Specification Add "Color / Finish" suffix to Model number, below.

The Bridge Style Kitchen Faucet shall be made of solid brass construction. Faucet shall incorporate a swivel spout assembly with integral side-spray diverter assembly and feature bridge-style brass valve bodies with quarter-turn washerless ceramic disc valve cartridges. Faucet shall have a 1.8 gallons (6.8 liters) per minute maximum flow rate. Product shall be for 8.00" (20.3 cm) centers. Product shall incorporate a 8.32" (21.1 cm) spout height at outlet and a 9.30" (23.6 cm) spout reach (c-c). Faucet shall incorporate traditional cross handles. Bridge-Style Kitchen Faucet with Sidespray shall be Newport Brass Model 1500-5412/____.

1500-5412

PRODUCT DIMENSIONS (Units are in inches)

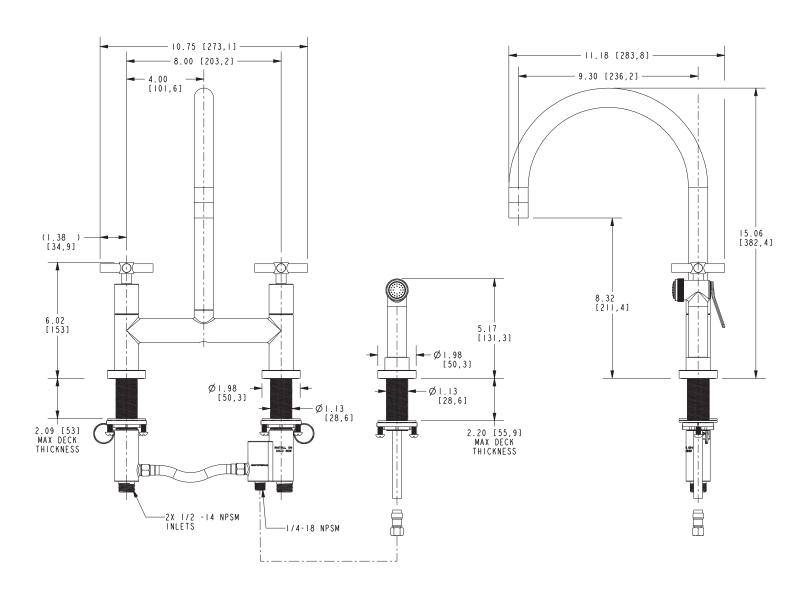

East Linear Bridge Style Kitchen Faucet **1500-5412**

