


**Features**

- Tested and certified to California Title 24 standards and JA8 2016 requirements
- Includes mirror defogging
- Dimmable LED task lighting to 1%
- Compatible with most Triac/Phase-cut dimmers
- Energy efficient LED lighting: (measurements may vary)

|          |      |
|----------|------|
| Kelvin   | 2700 |
| CRI      | 90+  |
| R9 Value | 50+  |

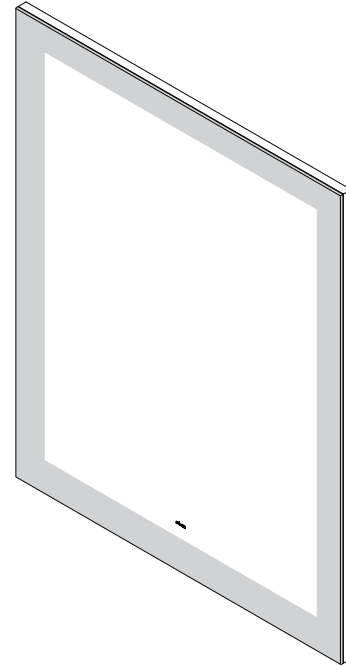

**Construction**

- Anodized aluminum back frame
- Quality polished edge mirror
- Power cords installed for easy plugin installation
- Constructed for surface mounting
- Includes installation hardware

**Codes/Standards Applicable**

Vitality Mirror is UL certified to:

- UL 962
- CSA-C22.2, No. 12-82

**Dimensions**


Height: 30" (762 mm)  
 Width: 24" (610 mm)  
 Depth: 1-3/4" (45 mm)  
 Net Weight: 23 - 39 lbs

**Electrical System**

- 120 Vac 60Hz wall outlet location as shown in drawing

**Model Number Key**

| Vitality | Mirror | Width | Height | Shape         | Light Pattern | Edge Type           | Defogger     | Color Temp | Options                      |
|----------|--------|-------|--------|---------------|---------------|---------------------|--------------|------------|------------------------------|
| Y        | M      | 24    | 30     | R = Rectangle | P = Perimeter | FP = Flat, Polished | D = Defogger | 3 = 2700K  | K = Title 24 Compliant Model |

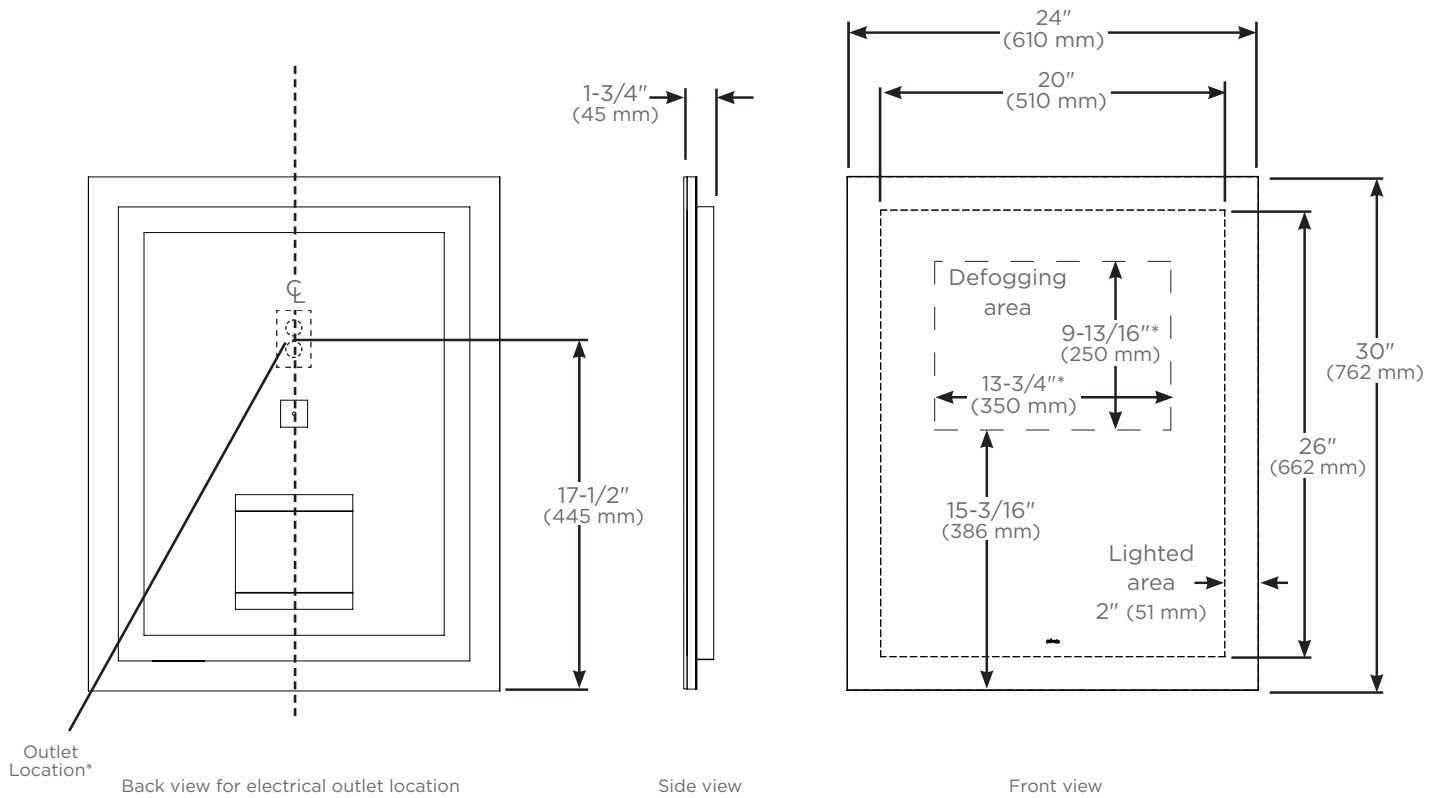

Outlet Location\*

Back view for electrical outlet location

Side view

Front view

\* See instructions 290-1277 for wiring and location

For additional information regarding Title 24 contact [customerservice@robern.com](mailto:customerservice@robern.com)