

Specifications

Devon


E-Mini Therm Valve Remote Thermostatic Valve

with Two-Way Diverter

Features:

- · Forged Brass Construction
- Adjustable Hot Limit Safety Stop with Push-In Override
- Flow capacity / Diverter 4.5 GPM / 45 psi
- · Certified to meet or exceed the following codes and standards:

ASME A112.18.1/CSAB 125.1-2012

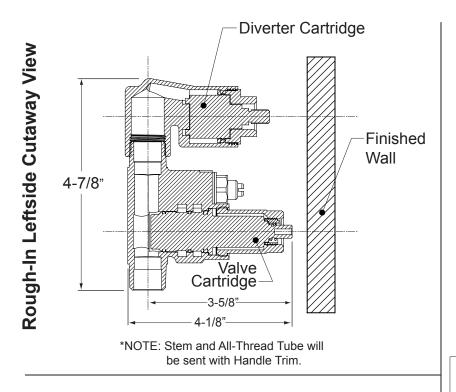


Finished Wall 2-5/8"-Rectangle Faceplate Leftside View 1/2" min. 4/5" 5-3/4" 1-3/4" 3-13/16" 1/8 1.0S4551T 5-3/4" x 3-3/4"

NOTE: MUST purchase Showerhead, Arm, Flange, and other options separately.

be sent with Handle Trim. 1/2" NPT Inlets Rough-In Top View Integral Screwdriver Stops 3-1/4" 4-1/8" REF. ONLY

*NOTE: Stem and All-Thread Tube will



NOTE: Measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.