
NIVEOUS - model: PD-52310, PD-52313 WAC LIGHTIN

dweLED™ LED Pendants

Responsible Lighting®

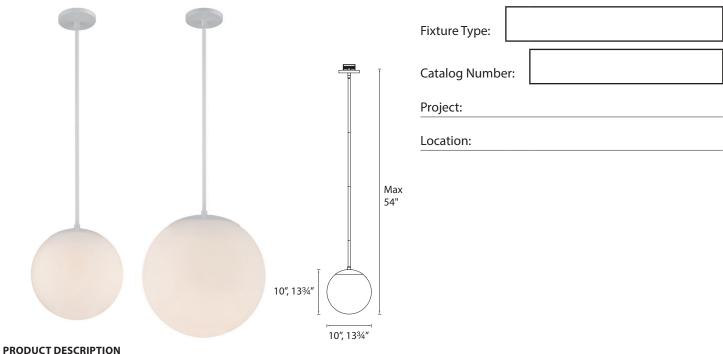

Optimized light distribution deploying multiple mid-powered LEDs to achieve an evenly lit globe, providing beautiful ambient illumination.

- · Mouth blown etched opal glass
- Integral swivel for sloped ceilings
- Three 12 inch and one 6 inch rods included (additional extension rods available)
- Supplied with 114 inch of wire
- ETL & cETL damp location listed
- · 70,000 hour rated life
- Color Temp: 2700K and 3500K
- 90 CRI
- Dimming: 100% -10% (ELV); 100% 5% (0-10V)
- 2.95" x 1.89" x 1.14" universal voltage driver installs within a junction box

SPECIFICATIONS

Construction: Mouth blown etched opal glass

ORDERING NUMBER

Model#	Diameter	Watt	LED Lumens	Delivered Lumens	Finis	h
PD-52310	10"	14W	906	685	BN	Brushed Nickel
PD-52313	13¾"	14W	906	715	WT	White

Example: PD-52310-WT

REPLACEMENT RODS

Model#		Finish	1
RPL-ROD-IN06 RPL-ROD-IN12	-		Brushed Nickel White

REPLACEMENT GLASS

Model#

RPL-GLA-52310	6"
RPL-GLA-52313	13"

waclighting.com Phone (800) 526.2588 (800) 526.2585 **Headquarters/Eastern Distribution Center** 44 Harbor Park Drive Port Washington, NY 11050

Central Distribution Center 1600 Distribution Ct Lithia Springs, GA 30122

Western Distribution Center 1750 Archibald Avenue Ontario, CA 91760