

**Florestone
Model 500
Barrier-Free
Terrazzo-
Shower Receptors**

**Architect's
Specifications**

Furnish and install wheelchair accessible Terrazzo Shower Receptor Model 500 as manufactured by Florestone Products Company. Flanges on three sides, cast integral, shall be of galvanized-bonderized steel and shall extend not less than 1" above the shoulders. Shoulders on three sides shall be not less than 2½" inside. Threshold shall be not more than ½" above receptor floor to allow for barrier free entrance with an integral ramp. Drain body shall be brass, cast integral, and shall provide for a non-caulked connection not less than one inch deep to a 2" pipe. Removable type stainless steel strainer plate shall be supplied. Receptor shall be manufactured of tan and white marble chips cast in white Portland cement to produce a compressive strength of not less than 3,000 PSI, seven days after casting. Terrazzo surface shall be ground, polished, and the entire unit sealed to resist stains and moisture. Receptors reinforced with 16-gauge wire.


Options

Offset drain.
Additional flanges.
(Drawings required)

Note: Terrazzo is not designed to be used with anything that is over 130 degrees Fahrenheit.



Model 500
Barrier free Terrazzo Shower Receptors with built-in stainless steel ramp.

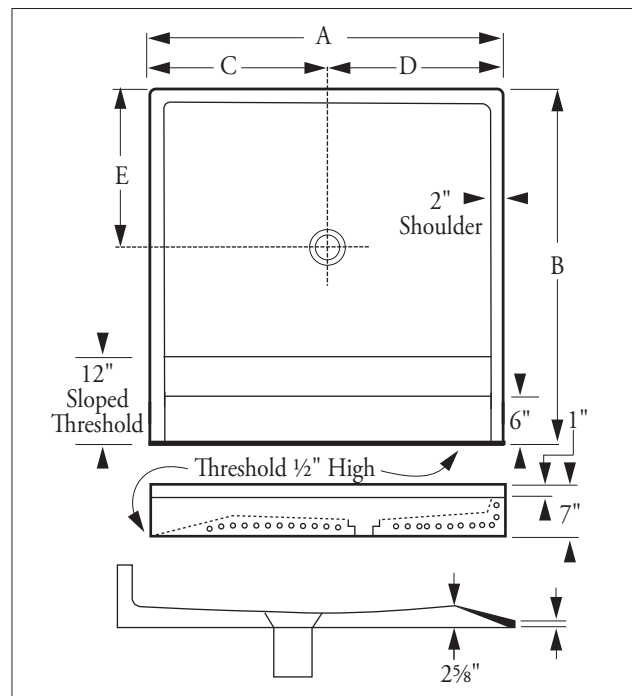

A	B	C	D	E	HT	WT
36"	36"	18"	18"	12"	7"	315
40"	40"	20"	20"	12"	7"	370
42"	48"	21"	21"	12"	7"	510
48"	48"	24"	24"	18"	7"	550

Note: Exterior floor drain for water run-off recommended.

Place receptor on a minimum ¼" bed of mortar or plaster for warranty compliance.

Standards:
UPC I.A.P.M.O. International Association of Plumbing and Mechanical Officials File No. 0687.



FLORESTONE PRODUCTS CO., INC.

2851 Falcon Drive • Madera, CA 93637

T. 559.661.4171 • T. 800.446.8827

F. 559.661.2070 • florestone.com

**Dimensions subject to change without notice.
Contact Florestone Products to verify product specifications.**