PT7800SH

GE Profile[™] Series 30" Built-In Combination Convection Microwave/Convection Wall Oven

9-1/2" MAX. RIGHT SIDE ONLY

CONDUIT

23-1/2" MIN.

Junction box

(Junction box

in adjacent

28" MIN. to bottom of

junction box

cabinet)

location

NOTE: Cabinets installed adjacent to wall ovens must have an adhesion spec of at least a 194°F temperature rating.

DIMENSIONS AND INSTALLATION INFORMATION (IN INCHES)


INSTALLATION INFORMATION: Before installing, consult installation instructions packed with product for current dimensional data.


Door handle protrudes 3" from door face. Cabinets and drawers on adjacent 45° and 90° walls should be placed to avoid interference with the handle.

Electric wall ovens are not approved for installation with a plug and receptacle. They must be hard wired in accordance with installation instructions.

Note: These ovens are not approved for stackable or side-by-side installations.

KW RATING		
240V	6.8	
208V	5.1	
BREAKER SIZE		
240V	30 Amps	
208V	30 Amps	

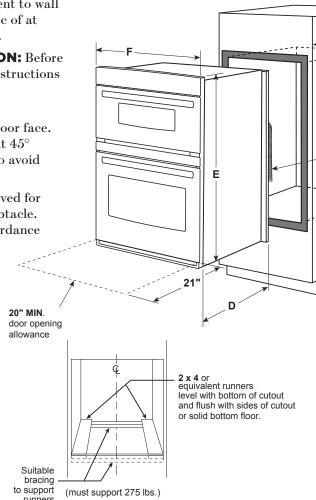

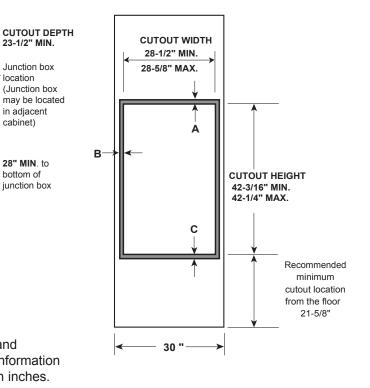

ATTENTION INSTALLER: All electric wall ovens must be hard-wired (direct-wired) into an approved junction box. A plug and receptacle is NOT permitted on these products.

NOTE: If the cabinet does not have a solid bottom, two braces or runners must be installed to support the weight of the oven. For single ovens, the runners and braces must support 200 lbs (91 kg). For double ovens, the runners and braces must support 375 lbs.

Dimension and

installation information

are shown in inches.

NOTE: If marks, blemishes or the cutout opening are visible above the installed oven, it may be necessary to add wood shims under the runners and front trim until the marks or opening are covered.

NOTE: If the cabinet does not have a front frame and the sides are less than 3/4" (1.9 cm) thick, shim both sides equally to establish the cutout width.

P	T7800
CABINET	30"
A –Overlap of oven at top of cutout	1"
B -Overlap of oven over side of edges of cutout	3/4"
C –Overlap of oven at bottom of cutout	1"
OVEN	
D –Install depth	23-1/2"
E –Overall height with trim	42-3/8"
F –Overall width	29-3/4"









PT7800SH

GE Profile[™] Series 30" Built-In Combination Convection Microwave/Convection Wall Oven

FEATURES AND BENEFITS

1.7 cu. ft. microwave capacity (1000 watts (IEC-705 test procedure)

Convection microwave (upper oven) - Circulates heat for high-quality results

16" turn table (upper oven) - Rotates food throughout the cooking cycle for even cooking results

True European Convection (lower oven) - Achieve delicious results from a third heating element and fan combination

Self-clean with steam clean option (lower oven) - Clean your oven the way you want

Self-clean heavy-duty oven racks (lower oven) - Conveniently clean your oven and racks together

Glass touch controls - Set temperatures quickly and clean with little effort

Halogen interior oven lighting (lower oven) - Easily see how your food is baking

Ten-pass bake element (lower oven) - Even baking is assured with heat that covers more surface area

Eight-pass broil element (lower oven) - Get full broil coverage and even browning from edge to edge $\,$

• Model PT7800SHSS - Stainless steel

GUARANTEED FIT

Replacing a similar wall oven from GE or another brand? GE wall ovens are guaranteed for an exact fit to make replacement easy

Visit geappliances.com for more info



