

Features ____

- Unique rimless bowl design
- Uses 20% less water than conventional toilets
- 1.28 gpf / 4.86 lpf low water consumption
- Elongated front, SmartHeight™ (16-9/16") bowl
- 3" flush valve
- Pilot operated fill valve
- 12" rough-in
- 2" glazed trapway
- Chrome trip lever
- Mansfield's® limited lifetime warranty
- Available in White





Components _____

| Model # | Description | Codes/Standards |
|-----------|--|------------------------|
| 4817-3816 | SmartHeight, elongated front, two-piece toilet. Less toilet seat | |
| | and supply. | HIGH EFFICIENCY TOILET |
| 4817 | Elongated front toilet bowl only. Less toilet seat. | HET SOLD ADA |
| 3816 | Tank and cover only, with left hand, front-mount, chrome trip | C W B Lands |
| | lever. Less supply. | |

Toilet seat not included




Specifications

| Model # | Description | Codes/Standards | | |
|-----------|---|----------------------------|--|--|
| 4817-3816 | SmartHeight™ elongated front (1.28 gpf/4.86 lpf) two-piece toilet | HIGH EFFICIENCY TOLLET ADA | | |

| Specification | Description | Specification | Description |
|----------------------|---------------------------------|-----------------|-----------------------------------|
| Material | Vitreous china | Trap Diameter | 2" |
| Water Pressure Range | 20 to 80 PSI | Trap Seal | 2" |
| Flush System | Gravity fed flushing technology | Rough-in | 12" |
| Water Usage | 1.28 gpf / 4.86 lpf | Shipping Weight | 73.6 lbs. (33.4 kg) |
| Water Surface Area | 7-1/4" X 10-1/2" | Warranty | Vitreous China - Limited Lifetime |
| MaP Rating | 800 grams | | Tank Trim - Limited One Year |

Technical Information

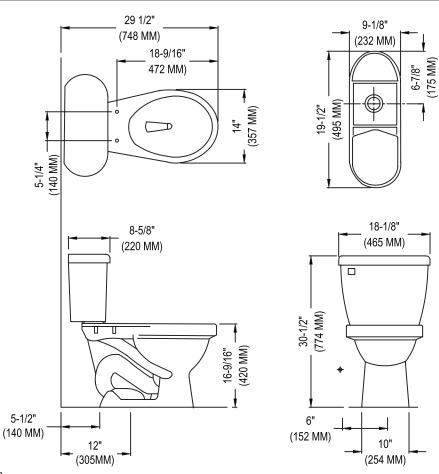

See our complete line of acrylic and vitreous china bathroom fixtures, plastic tank trim and plumbing products.

These dimensions are nominal and subject to change without notice.

Fixture performance and specifications meet or exceed ASME A112.19.2-2008/CSA B45.1-08 standards, and other state and local codes.